


HFS 65

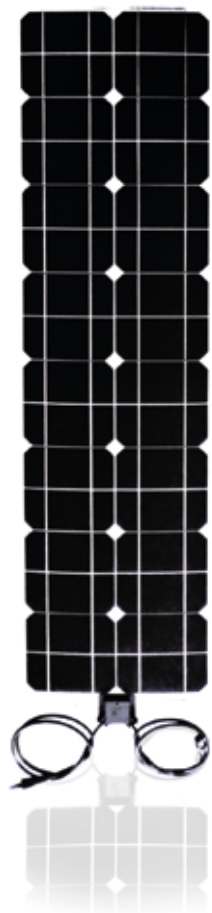

DATA SHEET

Peak power, Pmax [Wp]	65
Tolerance [%]	±3
Open circuit voltage, Voc [V]	20,04
Short circuit current, Isc [A]	4,21
Voltage at Pmax, Vmp [V]	16,76
Current at Pmax, Imp [A]	3,92
Short circuit current temperature coefficient [%/°C]	+0,043
Open circuit voltage temperature coefficient [%/°C]	-0,299
Maximum power temperature coefficient [%/°C]	-0,465
Fill factor [FF] [%]	78
Operating temperature [°C]	-40÷85
NOCT [°C]	47,5
Module material	UV resistant transparent polymer
Size (bxh) [mm]	1370x344
Thickness [mm]	1,7
Weight [kg]	1,2
Maximum system voltage [V]	1000
Cells	n.16 m-Si 156x156 2BB
Terminal ends	Cable with universal plug
Bypass diode [A]	12

HF SERIES

The Stripe series expressly created for the nautical and camping vehicle industries. The Hfs panels have two power classifications (40Wp and 65Wp) and are made of only two rows of cells, guaranteeing a thin look. This feature makes them particularly suitable for bimini tops, sailboat walkways and the roofs of campervans and other means of transport.